
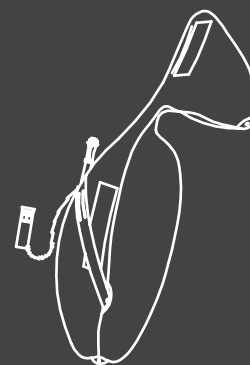
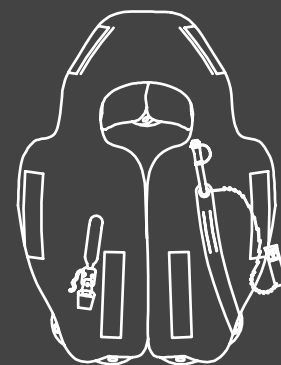
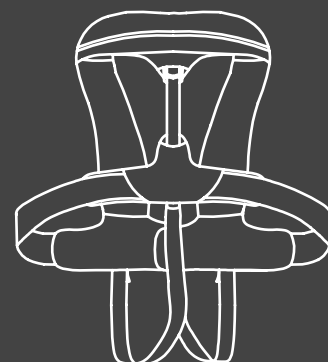


HURRICANE EVO 290

FEATURES	
codes: 09350 - 09351 - 09350/H	
Type	Inflatable life jacket
Activators	UML MK5 (code: 09350) automatic UML Micro Manual (code: 09351) manual Hammar MA1 EC (code: 09350/H) automatic Oral tube on all versions
Inspection window	Made of transparent PVC with activator status indicators
Canister	60 g 1/2" GAS threading
Effective buoyancy	290 N
Class	275
Fastening mechanism	Safety harness with 4-5mm strap with OYSTER SDC clasp and HDPE polymer fibre ring
Certifications	ISO 12402-2, ISO 12401
Size	Adult
Weight supported	> 50 kg
Waist circumference	86 - 124 cm
Casing	PL 420D PU + WR COATED material, black rhombus cluster ripstop in colour
Chamber	Single with X3D system, PA 420 PU COATED material, fluorescent yellow in colour
Product packaging	Carrying case in PL 420D PU + WR COATED, size approx. 55 x 33 cm, black cluster rhombus ripstop + PVC mesh
Product dimensions	Approx. 64 x 40 x 7 cm
Product weight	Approx. 1,700 g (code: 09350) Approx. 1,700 g (code: 09350/H) Approx. 1,650 g (code: 09351)
Packaging	60 x 40 x 40 cm
Warranty	24 months
Inspection	Every 24 months
Accessories on request	Safety line
Spare parts	Sprayhood, whistle, automatic emergency light, crotch strap, floating knife, rearming kit
Veleria San Giorgio reserves the right to modify the technical specifications without prior notice	

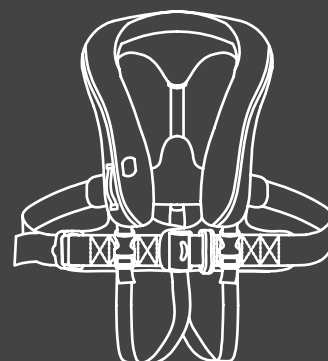

HURRICANE EVO 290

ISO 12402-2 certified inflatable life jacket, class 275, effective buoyancy 290 N, integrated ISO 12401 harness with side-adjustment clasp and new safety closure.

Designed for activities carried out in the open sea, even in extreme weather conditions, guaranteeing maximum safety during all types of navigation. Suitable for wearing even with heavy-weight clothing.

Easy and intuitive to wear, it is extremely comfortable thanks to the wraparound design studied down to the last detail. Its ergonomic characteristics ensure the utmost freedom and mobility aboard during navigation manoeuvres.

CASING FEATURES

- Collar in breathable mesh
- Back support
- Multi-purpose pocket with zipper
- Zipper closure with Quick Open System
- Side-adjustment clasp
- HDPE polymer fibre safety line ring
- Activation status viewing window
- Quick-release double crotch strap
- Rescue assistance loop
- Lifting handle



VERSIONS

CODE	PRODUCT NAME	ACTIVATION	ACTIVATORS
09350	HURRICANE EVO 290	AUTOMATIC	UML MK5
09351	HURRICANE EVO 290	MANUAL	UML MICROMANUAL
09350/H	HURRICANE EVO 290	AUTOMATIC	HAMMAR MA1/EC

HURRICANE EVO 290

Floating chamber with X3D system having a single-compartment rotation system in PA 420 PU-coated fabric with electronically-controlled high-frequency welds. Designed to contour to the body's ergonomics and optimise positioning in the water. Thanks to the special V-shape, it guarantees an immediate rotation of the body and, through the "fins" structure behind the nape, provides excellent support and perfect stability to the wearer's head. The chamber's design guarantees the best clearance of the mouth above the water in the inflatable vests category.






ACTIVATION SYSTEMS:

- Automatic: upon falling into the water, the system automatically activates within 5 seconds of submersion, with the inflation of the floatation chamber. Automatic activation occurs thanks to the salt activator UML MK5, through the dissolution of a water-soluble tablet or with the Hammar MA1 hydrostatic activator due to the pressure generated from being immersed in the water by at least 10 cm.
- Manual: the system is operated through pulling the dedicated lever. The product comes with the UML MICROMANUAL activator booklet and is activated exclusively by hand.
- Oral: this type of inflation is achieved via the special mouth tube, with a non-return valve and protective cap. To inflate the chamber, simply blow into the tube.









HURRICANE EVO 290

SPARE PARTS

	Double crotch strap	09150		LED light	03030
Use of this accessory improves the body's inclination, stability and positioning in the water.			Automatically activates upon falling into the water. Renders the device visible for up to a mile. SOLAS M.E.D.-certified and USCG approved		
	Whistle	25180		Floating knife	MP1500
A mandatory accessory that permits an emergency sound signal to be issued. ISO 12402-8 certified			Equipped with a resin handle, 18.5 x 7 cm serrated stainless-steel blade		
Rearming				UML adapter	25007
UML: rearming kit (26260), water-soluble tablet (25005), green MK5 pin (25003/MK5), green Micro-Manual pin (25003/UML2) Hammar: rearming kit (26360) Canister 60 g (26060)			To render automatic an activator, operating only manually NB: The UML adapter is not a spare part but an accessory.		

ACCESSORIES

	Elast. 2 aluminium hooks	11177		2 aluminium hooks	11174
	SAFETY STRAP Length: 2 metres Material: Aluminium			SAFETY STRAP Length: 2 metres Material: Aluminium	
	3 aluminium hooks	11175		Elast. 2 steel hooks	11176
	SAFETY STRAP Length: 1.4-2 metres Material: Aluminium			SAFETY STRAP Length: 2 metres Material: Stainless steel	
	2 steel hooks	11173		Steel hook + ring	11178
	SAFETY STRAP Length: 2 metres Material: Stainless steel			SAFETY STRAP Length: 2 metres Material: Stainless steel	



Remember to conduct a periodic inspection.
Book an inspection now by emailing us at: info@veleriasangiorgio.com



For more information, contact us at +39 0185 467701 or via our website veleriasangiorgio.com



To buy or learn more about this product, please refer to the QR Code or visit veleriasangiorgio.com

LIFE JACKETS AND LIFEBELTS, FLAGS AND BANNERS, TECHNICAL ITEMS, PERSONAL PROTECTIVE EQUIPMENT AND SAFETY

GEAR FOR CIVILIAN AND MILITARY FIELDS

Via Alcide De Gasperi, 37H - 16030 Casarza Ligure - Genoa - Italy

Tel. +39 0185 467701 - Fax +39 0185 467050 - info@veleriasangiorgio.com - www.veleriasangiorgio.com



LIFEJACKET MANUFACTURER
made in Italy