
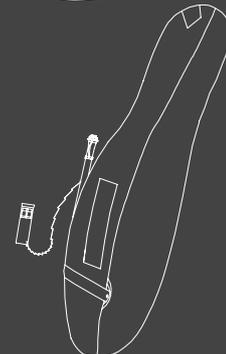
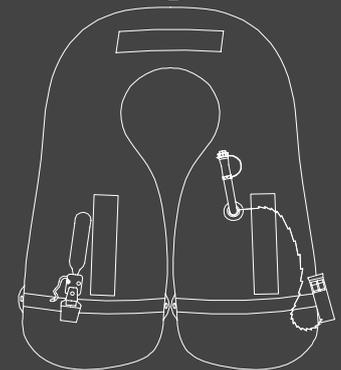
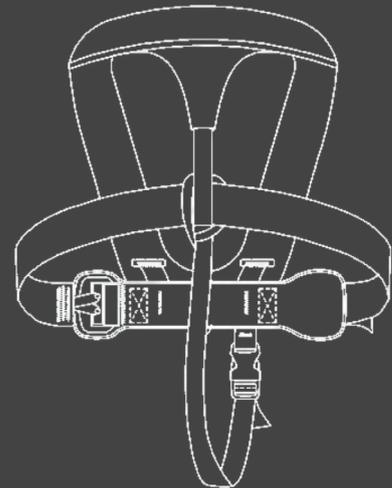


SPINNAKER 180 SAFE 4.0

FEATURES	
codes: 09330/SAFE 4.0/NEON - 09330/SAFE 4.0/ORANGE -09330/SAFE 4.0/GREY 09330/H/SAFE 4.0/NEON - 09330/H/SAFE 4.0/ORANGE - 09330/H/SAFE4.0/GREY	
Type	Inflatable life jacket
Activation Systems	UML MK5 (codes: 09330/SAFE 4.0/NEON - 09330/SAFE 4.0/ORANGE -09330/SAFE 4.0/GREY) automatic Hammar MA1 EC (codes: 09330/H/SAFE 4.0/ORANGE -09330/H/SAFE 4.0/NEON- 09330/H/SAFE4.0/GREY) automatic. Oral tube on all versions
Canister	38 g 1/2" GAS threading
Effective buoyancy	>180 N
Class	150
Fastening mechanism	Safety harness with 45mm strap with OYSTER SDC clasp and HDPP polymer fibre ring
Certifications	ISO 12402-3, ISO 12401
Size	Adult
Weight supported	> 40 kg
Waist circumference	86 - 124 cm
Casing	NEOPRENE+PES+PP (PL 420D PU + WR COATED on Grey version)
Chamber	Single, PA 420 PU COATED material, fluorescent yellow in colour
Product packaging	Cardboard Hanger
Product dimensions	Approx. 51 x 42 x 6 cm
Product weight	1.100 g (code: 09330/SAFE 4.0/NEON)
Packaging	60 x 40 x 40 cm (1 package with 8 pieces)
Warranty	24 months
Inspection	Every 24 months
Accessories on request	Safety line, automatic emergency light, Sprayhood and Transport Bag
Spare parts	Crotch strap, whistle and rearming kit, Spray Hood
Veleria San Giorgio reserves the right to modify the technical specifications without prior notice	

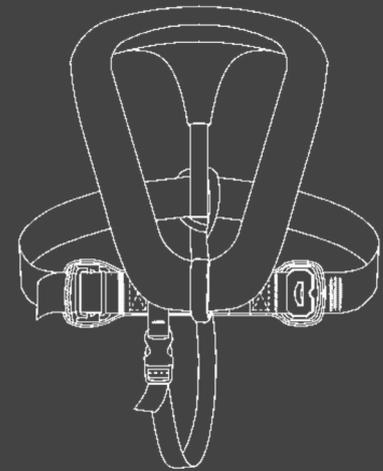

SPINNAKER 180 SAFE 4.0

ISO 12402-3 certified inflatable life jacket, class 150, effective buoyancy >180 N, integrated ISO 12401 harness with side-adjustment clasp and new safety closure Oyster SDC.

Designed for leisure activities in the open sea and/or under adverse weather conditions, it guarantees maximum safety for any type of navigation. Suitable for wearing over any garment.

Compact and comfortable, it offers the utmost freedom and mobility on board. The lateral closure allows the front ring to be perfectly centred on the abdomen and free from any impediment.

CASING FEATURES

- Inner breathable padded mesh
- Zipper closure with Quick Open System
- Side-adjustment clasp with a new Ergonomic design
- Waist tape with quick open buckle
- HDPP polymer fibre safety line ring
- Quick-release crotch strap with buckle
- Rescue assistance loop
- Lifting handle



NEON VERSION



GREY



ORANGE



VERSIONS

CODE	PRODUCT NAME	ACTIVATION	ACTIVATORS
09330/SAFE4.0/NEON	SPINNAKER 180 SAFE 4.0	AUTOMATIC	UML MK5
09330/H/SAFE4.0/NEON	SPINNAKER 180 SAFE 4.0	AUTOMATIC	HAMMAR MA1/EC
09330/SAFE 4.0/ORANGE	SPINNAKER 180 SAFE 4.0	AUTOMATIC	UML MK5
09330/H/SAFE4.0/ORANGE	SPINNAKER 180 SAFE 4.0	AUTOMATIC	HAMMAR MA1/EC
09330/SAFE 4.0/GREY	SPINNAKER 180 SAFE 4.0	AUTOMATIC	UML MK5
09330/H/SAFE4.0/GREY	SPINNAKER 180 SAFE 4.0	AUTOMATIC	HAMMAR MA1/EC

SPINNAKER 180 SAFE 4.0



Floatation chamber with single compartment in PA 420 PU COATED material with electronically-controlled high-frequency welds. Provides optimal positioning and perfect stability in the water. The thrust rotates an unconscious person and angles them so as to keep their airway free of water. What's more, once the chamber is inflated, it is possible to swim unimpeded to reach safety or to quickly climb into a lifeboat.

ACTIVATION SYSTEMS:

- Automatic: upon falling into the water, the system automatically activates within 5 seconds of submersion, with the inflation of the floatation chamber. Automatic activation occurs thanks to the salt activator UML MK5, through the dissolution of a water-soluble tablet or with the Hammar MA1 hydrostatic activator due to the pressure generated from being immersed in the water by at least 10 cm.
- Oral: this type of inflation is achieved via the special mouth tube, with a non-return valve and protective cap. To inflate the chamber, simply blow into the tube. This will be useful for a further swelling/deflation awaiting emergency.

SPINNAKER 180 SAFE 4.0

SPARE PARTS

	Sprayhood	09145/SK	Rearming	UML: rearming kit (26238), water-soluble tab (25005), green pin MK5 (25003/MK5) Hammar: rearming kit (26338) Canister 38 g (26038)
	Crotch strap	09330/SAFE4.0/NEON/SOTTOG 09330/SAFE4.0/ORANGE/SOTTOG 09150 (Only Grey Version)		Fischietto 25180 Accessorio obbligatorio che consente una segnalazione sonora d'emergenza. Certificato ISO 12402-8.
Use of this accessory improves the body's inclination, stability and positioning in the water.				

ACCESSORIES

	Borsa di Trasporto	09900		2 aluminium hooks 11174/OVER Length: 2 metres Material: Aluminium
	Elast. 2 aluminium hooks	11177		Elast. 2 steel hooks 11176 Length: 2 metres Material: Stainless steel
	3 aluminium hooks	11175/OVER		Steel hook + ring 11178 Length: 2 metres Material: Stainless steel
	2 steel hooks	11173/OVER		LED light 03030 Automatically activates upon falling into the water. Renders the device visible for up to a mile. SOLAS M.E.D.-certified and USCG approved
	UML adapter	25007		Floating knife MP1500 Equipped with a resin handle, 18.5 x 7 cm serrated stainless-steel blade
To render automatic an activator, operating only manually NB: The UML adapter is not a spare part but an accessory.				



Remember to conduct a periodic inspection.
Book an inspection now by emailing us at: info@veleriasangiorgio.com

For more information, contact us at +39 0185 467701 or via our website veleriasangiorgio.com

To buy or learn more about this product, please refer to the QR Code or visit veleriasangiorgio.com

LIFE JACKETS AND LIFEBELTS, FLAGS AND BANNERS, TECHNICAL ITEMS, PERSONAL PROTECTIVE EQUIPMENT AND SAFETY

GEAR FOR CIVILIAN AND MILITARY FIELDS

Via Alcide De Gasperi, 37H - 16030 Casarza Ligure - Genoa - Italy

Tel. +39 0185 467701 - Fax +39 0185 467050 - info@veleriasangiorgio.com - www.veleriasangiorgio.com

