

SKIPPER EVO **275**

FEATURES	
codes: 09675/24/HX/EVO Automatic - 09676/24/HX/EVO Manual - 09675/24/HX/EVO/H/ Automatic Manual	
Type	Inflatable life jacket
Activators	UML MK5 - automatic HAMMAR MA1/EC - automatic hammar UML Micro Manual - manual Oral tube on all versions
Canister	60 g GAS threading
Effective buoyancy	290 N
Class	275
Fastening mechanism	Safety harness with a 45 mm strap, quick-release fastening system in acetal resin and integrated adjustment, double safety strap attachment with side-adjustment inox clasp.
Certifications	ISO 12402-2, ISO 12401
Size	Adult
Weight supported	> 40 kg
Waist circumference	80 - 125 cm
Casing	PL 600D PU COATED material, black and blue in colours
Chamber	Single, PA 420 PU COATED material, fluorescent or yellow in colour
Product packaging	PL 600D PU COATED Carrying mesh case
Product dimensions	50 x 30 x 5 cm +/- 5%
Product weight	1,700 g +/- 5% - Automatic 1,650 g +/- 5% - Manual 1,700 g +/- 5% - Automatic Manual
Packaging	60 x 40 x 40 cm (16 pcs per box)
Warranty	24 months
Inspection	Every 24 months
Accessories on request	Sprayhood, automatic emergency light, crotch strap, safety line
Spare parts	Whistle, rearming kit
Veleria San Giorgio reserves the right to modify the technical specifications without prior notice	

DONNING INSTRUCTIONS



SKIPPER EVO 275

Inflatable life jacket, ISO 12402-3 certified, class 275, effective buoyancy 290 N, integrated ISO 12401 harness with quick-release clasp in acetal resin with side-adjustment inox clasp.

Designed for recreational activities carried out in the open sea and/or under adverse weather conditions, with the possibility to safely await rescue even in rough waters. Provides maximum safety for any type of navigation.

Easy and intuitive to wear, it offers the utmost freedom and mobility aboard during navigation manoeuvres.

CASING FEATURES

- Collar in mesh fabric
- Rear strap with backplate
- Zip closure
- Quick-release clasp
- Side-adjustment inox clasp
- Double ring for the safety line
- Rescue assistance loop behind the head
- Lifting handle
- Available in two colors:

09675/24/HX/EVO/NE 09675/24/HXEVO/BL
 09676/24/HX/EVO/NE 09676/24/HX/EVO/BL
 09675/24/HX/EVO/H/NE 09675/24/HX/EVO/H/BL



VERSIONS




CODE	PRODUCT NAME	ACTIVATION	ACTIVATORS
09675/24/HX/EVO	SKIPPER EVO 275	AUTOMATIC	UML MK5
09676/24/HX/EVO/H/	SKIPPER EVO 275	HAMMAR	HAMMAR MA1/EC
09675/24/HX/EVO	SKIPPER EVO 275	MANUAL	UML MICROMANUAL

SKIPPER EVO 275

Floatation chamber with single compartment in PA 420 PU COATED material with electronically-controlled high-frequency welds. Provides optimal positioning and perfect stability in the water. The thrust rotates an unconscious person and angles them so as to keep their airway free of water. What's more, once the chamber is inflated, it is possible to swim unimpeded to reach safety or to quickly climb into a lifeboat.

ACTIVATION SYSTEMS:

- **Automatic:** upon falling into the water, the system automatically activates within 5 seconds of submersion, with the inflation of the floatation chamber. Automatic activation is possible with the salt activator UML MK5 and HAMMAR MA1/EC, through the dissolution of a water-soluble tablet.
- **Manual:** the system is operated through pulling the dedicated lever. The product comes with the UML MICROMANUAL activator booklet and is activated exclusively by hand.
- **Oral:** this type of inflation is achieved via the special mouth tube, with a non-return valve and protective cap. To inflate the chamber, simply blow into the tube.

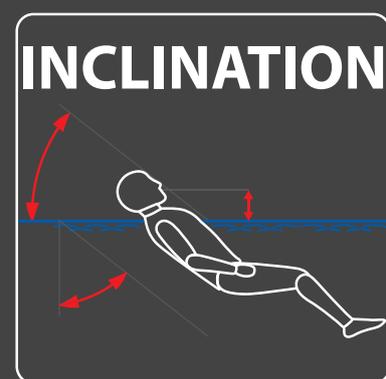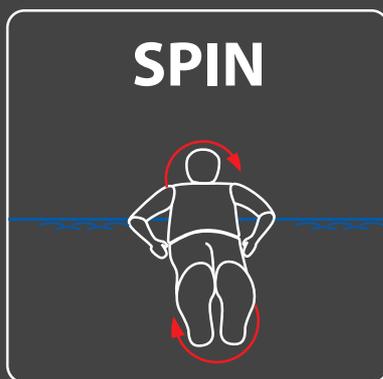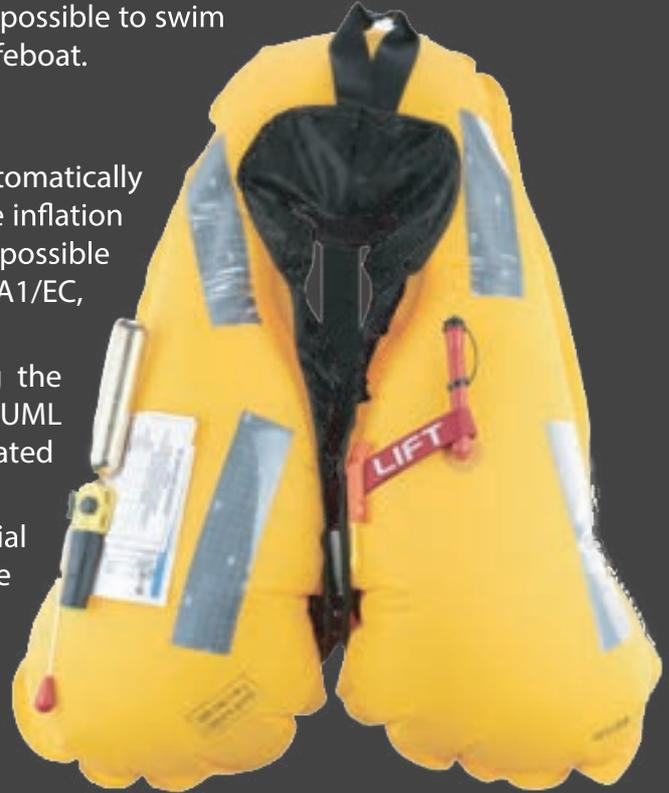

SKIPPER EVO **275**

SPARE PARTS

	Whistle A mandatory accessory that permits an emergency sound signal to be issued. ISO 12402-8 certified	25180	Rearming UML: rearming kit (26233), water-soluble tablet (25005), green MK5 pin (25003/MK5) Canister 33 g (26033)
--	--	--------------	--

ACCESSORIES

	Elast. 2 aluminium hooks SAFETY STRAP Length: 2 metres Material: Aluminium	11177		2 aluminium hooks SAFETY STRAP Length: 2 metres Material: Aluminium	11174
	3 aluminium hooks SAFETY STRAP Length: 1.4-2 metres Material: Aluminium	11175		Elast. 2 steel hooks SAFETY STRAP Length: 2 metres Material: Stainless steel	11176
	2 steel hooks SAFETY STRAP Length: 2 metres Material: Stainless steel	11173		Steel hook + ring SAFETY STRAP Length: 2 metres Material: Stainless steel	11178
	Sprayhood Reduces the risk of secondary drowning via inhalation of nebulised water. Improves detection of the castaway.	09145/SK		LED light Automatically activates upon falling into the water. Renders the device visible for up to a mile. SOLAS M.E.D.-certified and USCG approved	03030
	Crotch strap Use of this accessory improves the body's inclination, stability and positioning in the water.	09146		Crotch strap Use of this accessory improves the body's inclination, stability and positioning in the water.	09148



Remember to conduct a periodic inspection. Book an inspection now by emailing us at: info@veleriasangiorgio.com



For more information, contact us at +39 0185 467701 or via our website veleriasangiorgio.com



To buy or learn more about this product, please visit veleriasangiorgio.com

LIFE JACKETS AND LIFEBELTS, FLAGS AND BANNERS, TECHNICAL ITEMS, PERSONAL PROTECTIVE EQUIPMENT AND SAFETY GEAR FOR CIVILIAN AND MILITARY FIELDS
 Via Alcide De Gasperi, 37H - 16030 Casarza Ligure - Genoa - Italy
 Tel. +39 0185 467701 - Fax +39 0185 467050 - info@veleriasangiorgio.com - www.veleriasangiorgio.com

